

RPE MODEL RM-10 VALVE BAG FILLER

PNEUMATIC FLUIDIZING
TOP PRESSURE ASSIST

FEATURES

- FLUIDIZING OPTIONS TO SUIT YOUR PRODUCT
- PRESSURE ASSIST PRODUCT CHAMBER FOR IMPROVED CONTROL AND FASTER FILLING
- LOW PRESSURE BLOWER NOT REQUIRED FOR FINE POWDERS
- FULL FLEXURE MOUNTED WEIGHING MECHANISM FOR CONSISTENT SUPPORT THROUGH SCALE TRAVEL
- SCALE ASSEMBLY AND OPERATOR GAUGES MOUNTED AT FRONT OF BAGGER
- ALL PNEUMATIC EXPLOSION-PROOF CONTROLS STANDARD
- MODULAR DESIGN FOR EASY ADD-ON OF MULTIPLE UNITS


RPE MODEL RM-10 VALVE BAG FILLER

A simultaneous fill and gross weighing machine, the RM-10 is an efficient, fluidizing bagger incorporating a pressurized product chamber for improved product handling.

PRINCIPLES OF OPERATION

The heart of the bagger is a fluidizing hopper with a quick-drop plenum bottom and quick opening hopper outlet port. The air required to fluidize the product enters the plenum bottom and is dispersed through the porous fluidizing pad covering the plenum. The properly controlled fluidization air causes the product to flow freely from the hopper and into the bag.

The upper product chamber of the bagger uses a positive sealing butterfly type product infeed valve to close the top of the product chamber during the bag filling cycle. The chamber is then pressurized by means of either compressed (plant) air, or by a low pressure/high volume positive blower. This added pressurization means faster filling, tighter packed bags, and better weight accuracy.

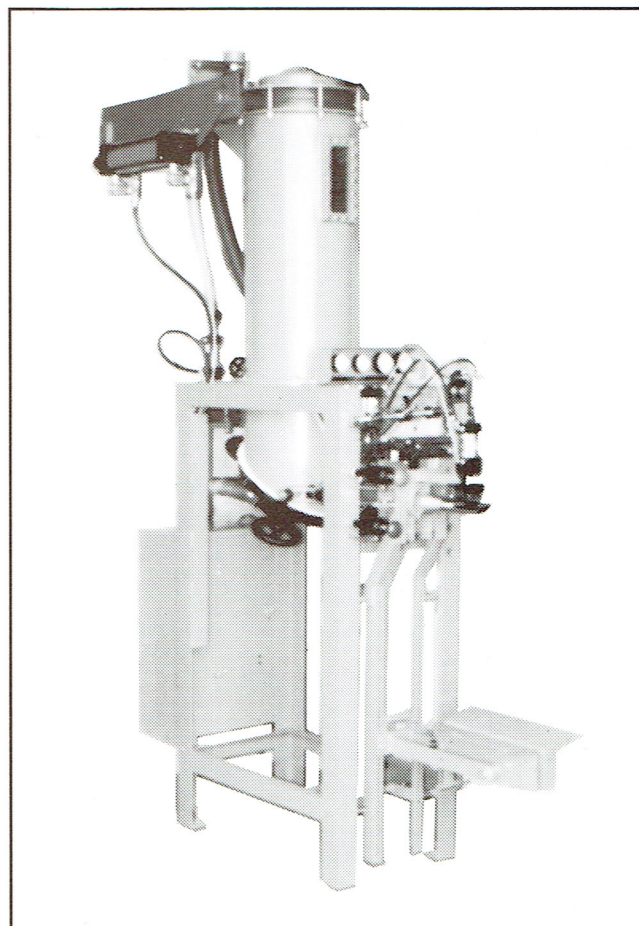

SPECIFICATIONS

Height: 7' 9" Floor-to-Inlet (typical w/30" chamber)

Width: 19"

Depth: 82¹/₂"

Weight: Approximately 950 lbs.

Bag Weight Range: 20 to 120 lbs.

Air Requirement: Clean, dry, compressed air

CFM: 1 cu. ft./bag/min.

Pressure: 80 PSI (65 PSI min.)

SCALE AND WEIGHING MECHANISM

The weighing portion of the bagger, including the fill spout and bag saddle, is supported by flexure plates. The standard mechanical scale is a rugged, compact, entirely front mounted unit using only two inverted pivots and two beams. The bag weight is adjusted using counterweights within easy reach of the operator. Optional electronic weighing is available with several variations including two-stage filling, microcomputer control, and printer options.

CONSTRUCTION

The Model RM-10 uses a heavy duty, structural steel modular frame design, only 19" wide. Multiple units may be stationed side-by-side on any center line spacing to suit. Additional units may be added as your production requirements increase.

CONTROLS


All pneumatic controls are standard, meeting explosion-proof installation. Electro-pneumatic controls are also available to interface with special circuitry requirements. Control components are mounted on a panel at the rear of the bagger and are protected by a lift-off cover for ease of access.

OPTIONS

- Automatic start, bag discharge, fill tube purge, product sampling
- Custom fill spouts, air alleviating spouts, replaceable liner spouts
- Drum & pail filling attachments
- Stainless steel facings, special finishes
- Dust pick-up hoods to suit requirements
- Special dimensions to suit your installations

EACH MACHINE WE MANUFACTURE IS CUSTOM BUILT TO YOUR REQUIREMENTS.
PLEASE CONTACT US TO DISCUSS YOUR APPLICATION IN DETAIL


DIMENSIONS

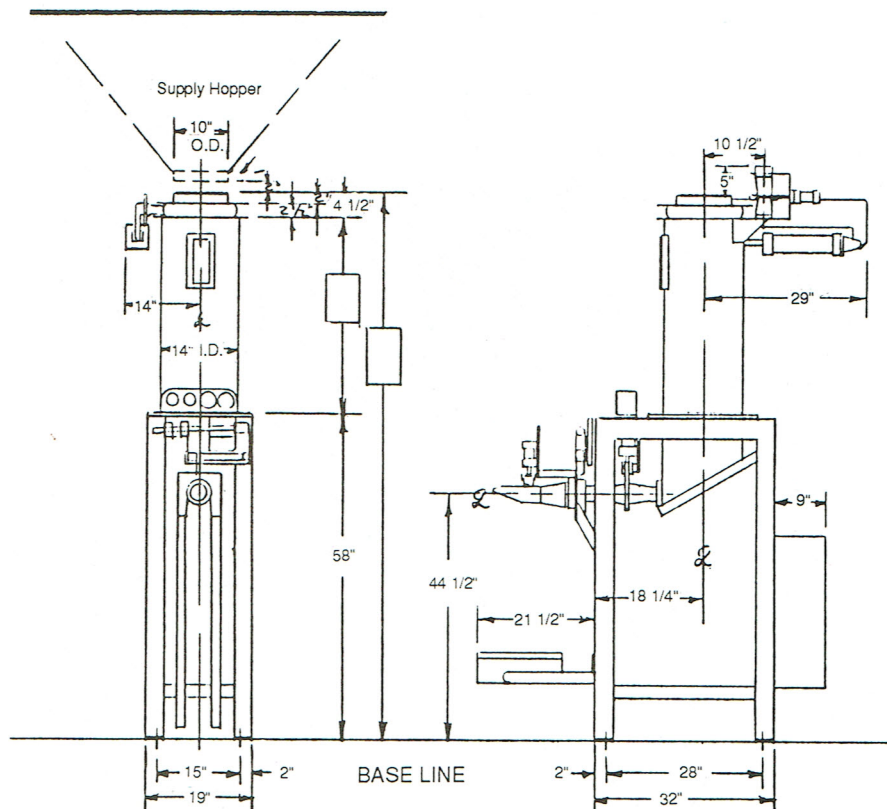



**ROBEY PACKAGING EQUIPMENT
& SERVICE, INC.**

3236 Rennie Smith Drive
South Chicago Heights, IL 60411

Phone: 708-758-8250
Fax: 708-758-8252

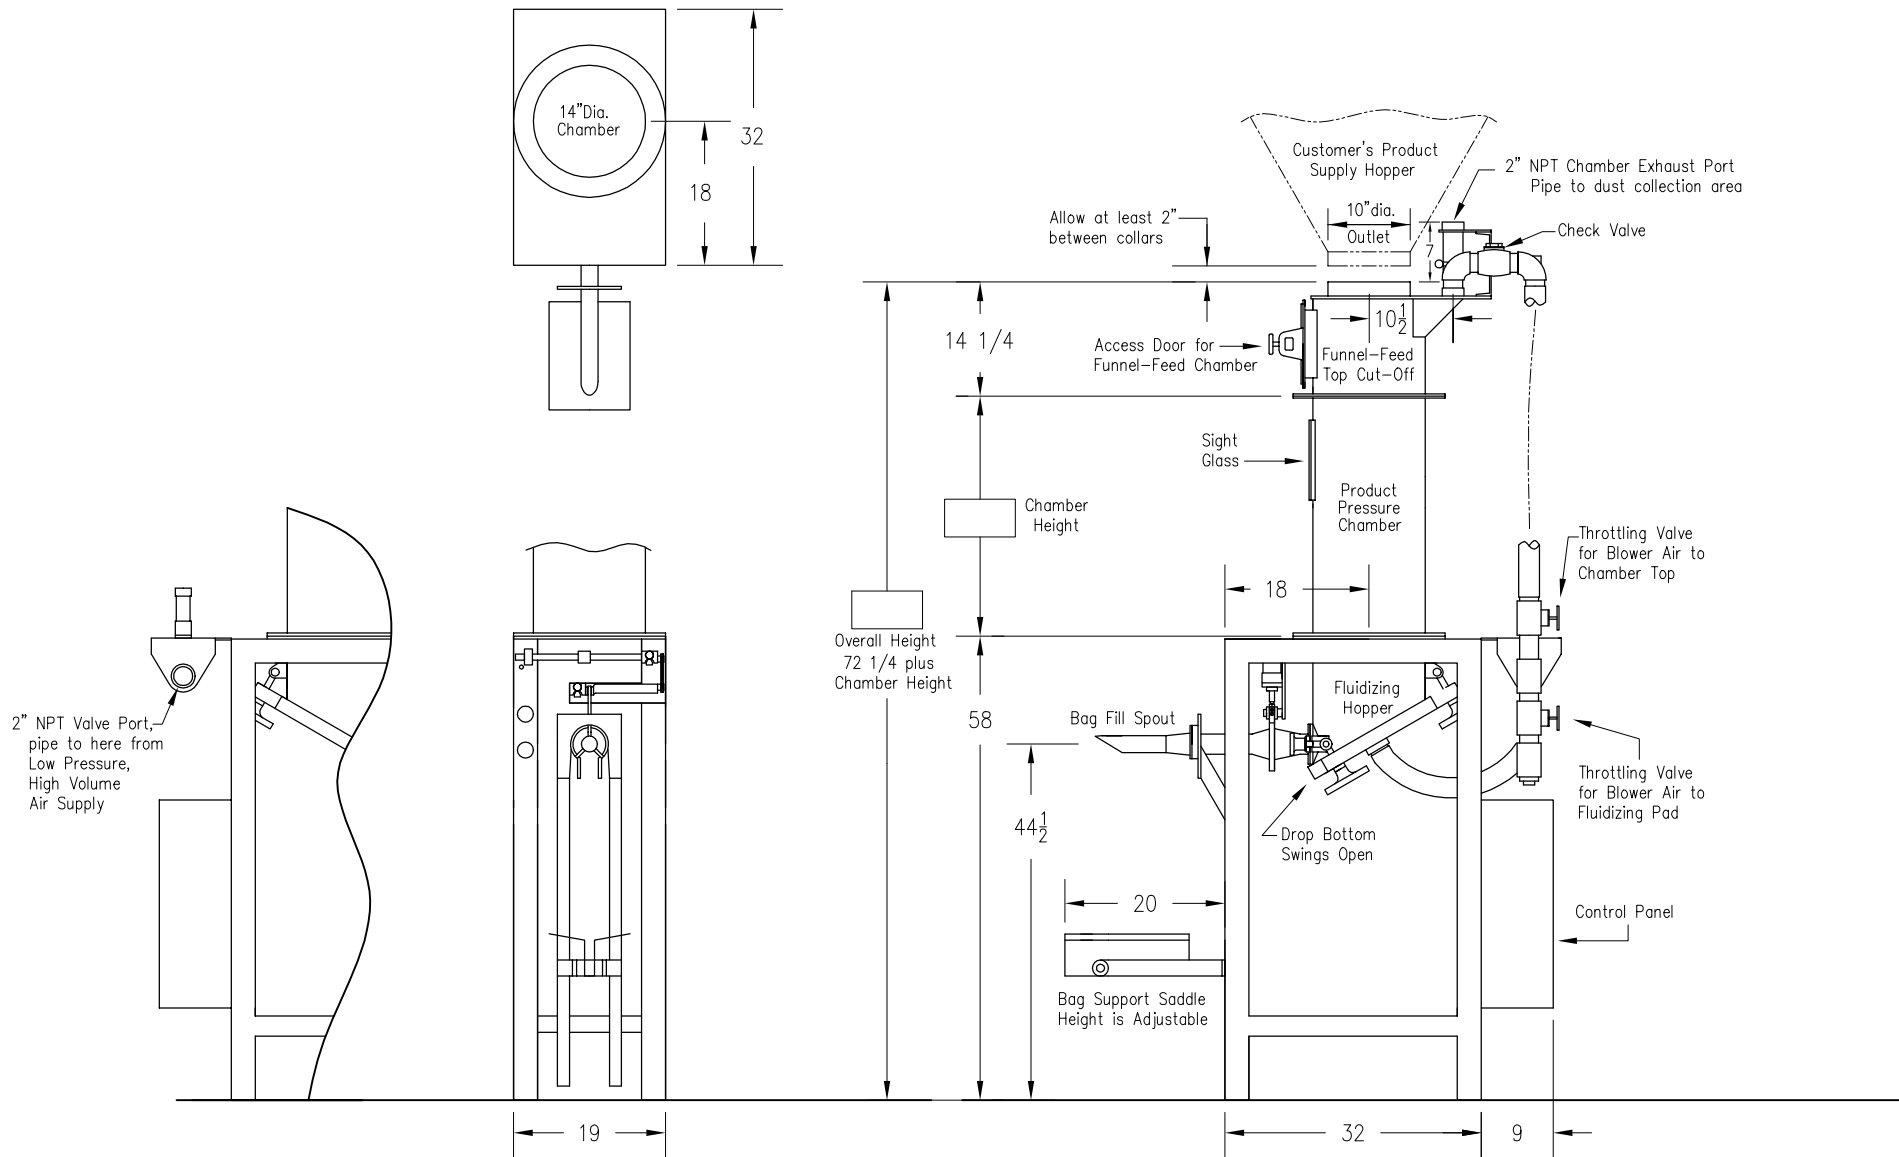

REVISIONS			ROBEY Packaging Equipment & Service, Inc			
No.	DATE	BY	3236 Rennie Smith Dr., So. Chicago Heights, IL 60411			
			Outline Dimensions Model RF-6 Fluidizing Bagger with Funnel Feed Top Inlet Valve			
			BY:	DATE:	SCALE:	DRAWING NUMBER:
			D.R.	3-10-88	1/2"=1'0	A13-2676
			MATERIAL:			

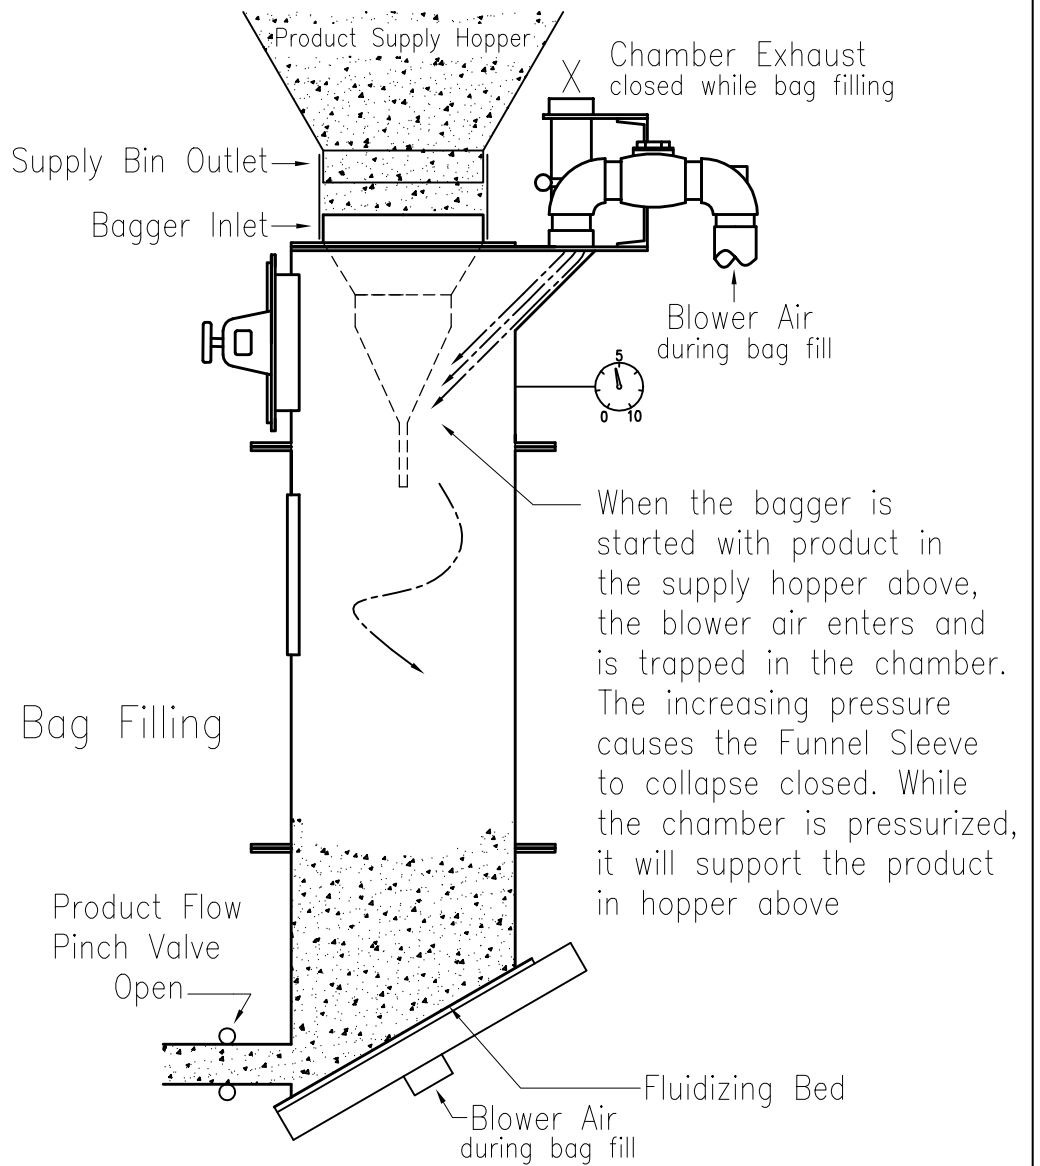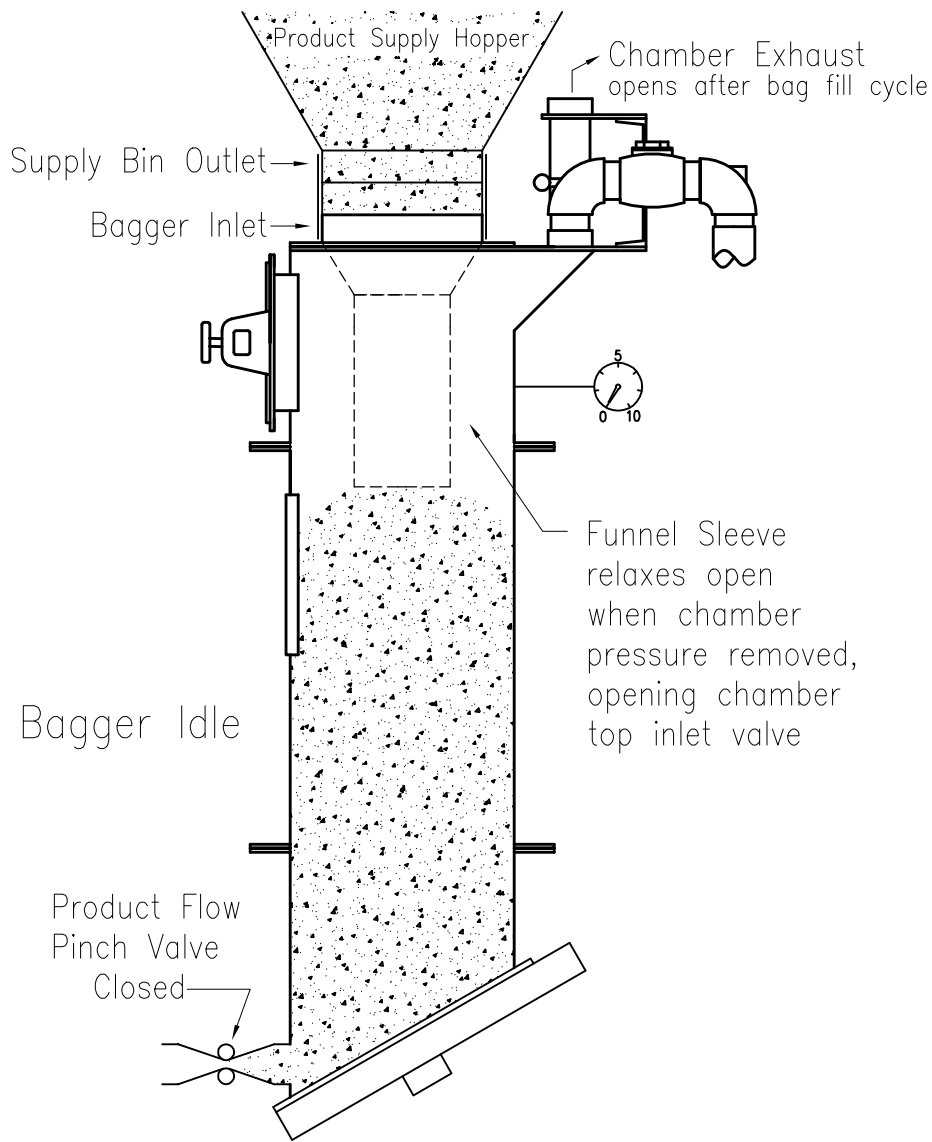

REVISIONS			ROBEY Packaging Equipment & Service, Inc			
No.	DATE	BY	3236 Rennie Smith Dr., So. Chicago Heights, IL 60411			
1	1-24-13	DR	OPERATIONAL SEQUENCE			
			RF-6 Bagger Funnel-Feed Top Cut-Off Valve			
			BY: D.R.	DATE: 6-30-87	SCALE: NTS	DRAWING NUMBER: A13-3042
			MATERIAL:			

720TM*i*

PROGRAMMABLE
HMI INDICATOR/
CONTROLLER



RICE LAKE[®]
WEIGHING SYSTEMS

To be the best by every measure[®]

800-472-6703
www.ricelake.com
m.ricelake.com

For every actio



Intelligence Made Easy

The 720i is the first in a line of powerful and intelligent HMI devices from Rice Lake. This weight indicator breaks away from our pack

of basic models with its ability to control more processes, more equipment, and more information than ever before.

Automate entire systems by dictating batch formulation, inventory management, or traceability. Capture and store weight data. Link more peripheral equipment. And do it all with incredible ease.

The attractive 720i design presents a complete operator keypad showcased in either universal or panel-mount enclosure styles. Programmable soft keys and operator prompts offer more control for busy industrial settings. Programming is easier than ever using either the standard configurable batch engine or 720i's exclusive ProAction™ software.

Local remote capability allows multiple indicators to simultaneously display the same data. Truck scale operations, data collection, batching or networking—this multifaceted HMI can handle them all.

The 720i comes standard with two full duplex serial ports, eight digital I/O, 20 auxiliary print formats and a complete set of popular features. Plus we've included one option slot to use with a selection of networking and option cards. Take your 720i to the next level and create an indicator as unique as your process.

Intuitive, easy-to-use local display

Character sizes are $\frac{3}{4}$ " and backlit for easy readability at a distance, in bright sunlight and dim light.

Four (4) Soft Keys

Soft keys allow the operator to easily create new keys and understand functions and selections.

Configurable Batch Engine

Allows you to design your own multi-step procedure to automatically run from beginning to end.

ProAction™

The fastest, most powerful single scale controller available with an onboard process control engine and database storage.



Improving the Process

Several unique features set the 720i apart in truck and vehicle scale applications.

- More peripheral equipment, PCs, printers, stop/go lights, remote displays and more
- Local/remote capability—put one 720i in the office and one at the scale to display the same weight data
- Value swapping—accurately interpret the tare value to report gross-net without negative numbers
- Multi-range and multi-interval allow for more incremental flexibility
- Alibi Tracking for reprinting tickets from scale history
- And NEW Advanced Truck Mode (ATM)

With ATM, experience even more data storage and reporting capabilities. Ramped up memory capacity stores up to 99 unique customer, material or source files and more than 1400 transaction files.

on there's 720i



**NEMA 4X/IP66
Rated Enclosure**
Heavy-duty, stainless steel embossed enclosure is ideally suited for toughest industrial environments.

**Zero/GrossNet
Menu/Tare/Units
Print Keys**
Most common interface keys located on the front panel for easy access.

**Deterministic I/O
Control**
The 720i essentially combines all the features and benefits of weight-based control system architecture with that of a typical PLC.

Simple, start to finish

Using the same straightforward configurable batch engine as Rice Lake's other programmable indicators, the 720i allows you to design your own multi-step procedure to run automatically from beginning to end. Up to 32 setpoints are available for driving the actions your system requires. Once configured, the process can be started, paused, or stopped with softkeys on the display, or signaled from other sources like serial commands or digital inputs. Each action can be named and displayed as it's performed. Choose to run your process manually, a number of times through, or continuously.

Figure 1

The example below displays a simple sequential process that could be programmed using 720i's standard batch engine. At the touch of a button gates (A) release product into a large hopper. The product is then measured using weight data collected from load cells (B). Next, the 720i signals a motor (C) to mix the hopper contents for a given length of time. Lastly, another gate (D) is engaged to discharge a certain amount of product based on weight (B), while a conveyor system is simultaneously activated (E).


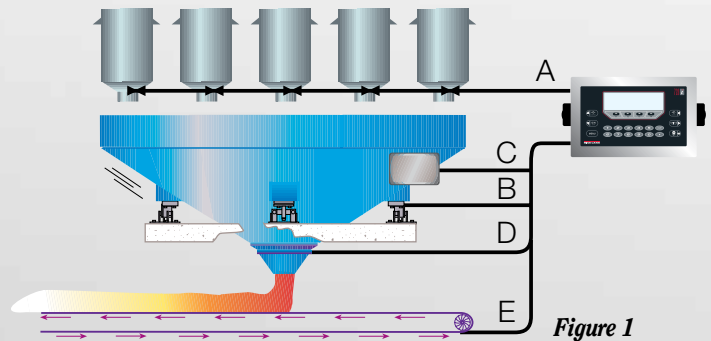


Figure 1

With ATM the 720i can also provide a range of useful reports, whether by shift, by customer, material, or summary of a day or an entire date range—to name a few.

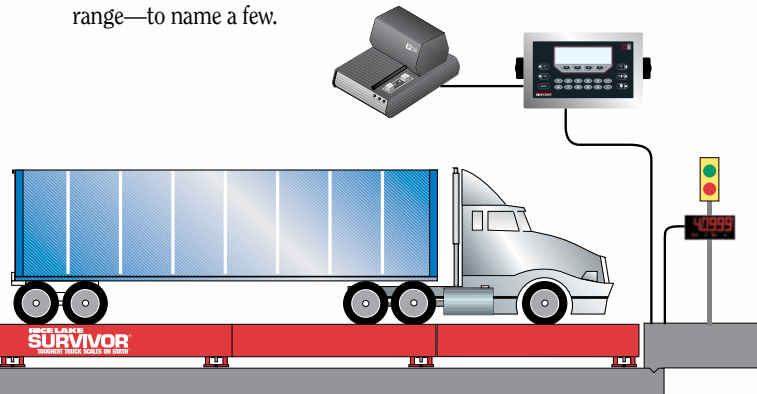

ProAction The Power to do More

To make full use of 720i's functionality and power, the ProAction programming tool can be installed. This software speaks to your 720i like no other program can. ProAction takes the standard batch engine one step further by removing the constraints of sequential control, adding data collection, and giving your 720i the flexibility to perform more operations simultaneously. Create programs to prompt your operator through a process, store formulas, or even collect weight data and generate reports.

Take your process to the next level and customize your indicator to its highest potential. ProAction is ready. This incredible programming function is available for use with every 720i.



Looking for even more programming power and flexibility?

Ask your Rice Lake distributor about the incredibly flexible, infinitely expandable, high-speed programmable 920i® HMI indicator/controller.

720i PROGRAMMABLE HMI INDICATOR/CONTROLLER

Standard Features

- LCD display size:
Panel mount 3.8in x 1.2in
Universal 5.3in x 1.5in
- Four soft keys
- Truck in/out, 1,000-ID memory
- Advanced Truck Mode 1400+ transaction files (720i PCE)
- Digital I/O (expandable) (8)
- One option slot for pluggable options
- Auxiliary print formats (20)
- Time and date
- Audit trail tracking and Alibi storage
- Peak hold
- Rate of change
- Multi-range/interval
- Local/remote

720i PCE

- ProAction process control engine - define conditions and actions
- Evaluates multiple steps simultaneously
- Data storage onboard, user-defined

720i Batch

- (32) Configurable batch steps or free running setpoints

Functionality:

- Two full duplex serial ports
- One remote keyboard port
- Slot for option card
- Separate slot for fiber optic, Ethernet or USB

Options/Accessories

- Digital I/O, 24 channel
- Dual-channel serial, 20mA, RS-232, RS-485
- Analog output selectable (0-10V, 0-20 mA)
- USB Port (PC connection only-replaces serial port)
- DC/DC converter kit, 9-36 VDC nominal
- Fiber optic communication board
- Remote Keyboard
- Filter PreVent™ vent kit

Communication protocol cards

- Ethernet TCP/IP Port
- Ethernet TCP/IP module (installed in option slot)
- Wireless LAN card
- Allen-Bradley® Remote I/O interface
- Profibus® DP interface
- DeviceNet™ interface
- Ethernet IP interface



Specifications

Display Viewable area:	Panel mount 3.8in x 1.2in (96 x 30mm); Universal 5.3in x 1.5in (133 x 39mm) 240 x 64 pixel, back lit VGA Liquid Crystal Display (LCD) module with adjustable contrast
Excitation Voltage:	10 VDC, 16 x 350Ω load cells
A/D Sample Rate:	7.5 to 960 Hz, software selectable
Resolution:	Internal resolution: 8,000,000 counts 23 bit Weight display resolution: 9,999,999
Serial Ports:	Two ports on CPU board support up to 115,200bps
Digital I/O:	Eight channels on CPU board
Circuit Protection:	RFI, EMI, ESD protection
Rating/Material:	NEMA 4X/IP66, stainless steel
Operating Temperature:	Legal: 14° F to 104° F (-10°C to +40°C) Industrial: 14° F to 122° F (-10°C to +50°C)

Approvals



Your Rice Lake Weighing Systems distributor is:


Enclosure Options

UNIVERSAL MOUNT

Model Specific Features

- 360° mounting configuration
- NEMA 4X enclosure IP66

- A = 12.24"
- B = 10.50"
- C = 7.25"
- D = 10.80"
- E = 10.38"
- F = 3.52"
- G = 5.25"




PANEL MOUNT

Model-Specific Features

- Optimizes panel space
- Display separate from Controller box

- A = 7.36"
- B = 6.12"
- C = 1.58"
- D = 3.88"
- E = 2.45"

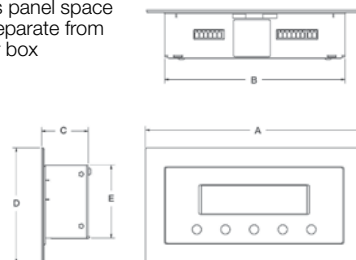


PANEL MOUNT CONTROLLER BOX

Model Specific Features

- Locate up to 1,000 feet from display
- Machine screw or clip in din rail mount

- A = 12.75"
- B = 10.95"
- C = 2.00"
- D = 5.90"

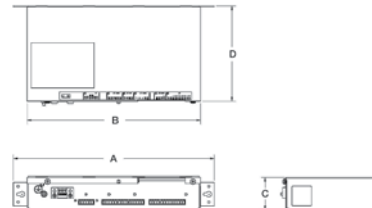

RICE LAKE

WEIGHING SYSTEMS

To be the best by every measure®

230 W. Coleman St. • Rice Lake, WI 54868 • USA
TEL: 715-234-9171 • FAX: 715-234-6967 • www.ricelake.com

An ISO 9001 registered company © 2013 Rice Lake Weighing Systems PN 104809 4/13
Specifications subject to change without notice